



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 660 580 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **94120425.7**

(51) Int. Cl.⁶: **H04N 1/333**

(22) Date of filing: **22.12.94**

(30) Priority: **24.12.93 JP 328955/93**

(43) Date of publication of application:
28.06.95 Bulletin 95/26

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **SHARP KABUSHIKI KAISHA**
22-22 Nagaike-cho
Abeno-ku
Osaka (JP)
Applicant: **NIPPON TELEGRAPH AND**
TELEPHONE CORPORATION
1-6 Uchisaiwaicho 1-chome
Chiyoda-ku
Tokyo (JP)

(72) Inventor: **Makiyama, Takeshi**
202 2nd Leo Palace Yashiki
9-10, Sakuradai Kashiwa-shi Chiba (JP)
Inventor: **Nakagawa, Yoshihiro**

C-113 La Pole Honda
2-24-7 Honda-cho,
Midori-ku Chiba (JP)
Inventor: **Hibi, Keiichi**
B-211 3-328 Shinmatsudo Matsudo-shi
Chiba (JP)
Inventor: **Iwano, Tsuneaki**
3-35-1-1205 Hamadayama Suginami-ku
Tokyo (JP)
Inventor: **Nakamura, Osamu**
5-2-12-307 Mitsugida Hanno-shi
Saitama (JP)
Inventor: **Nakano, Hirotaka**
5-10-1-5-203 Kichijoujima-machi
Masashino-shi,
Tokyo (JP)


(74) Representative: **TER MEER - MÜLLER -**
STEINMEISTER & PARTNER
Mauerkircherstrasse 45
D-81679 München (DE)

(54) **Image-information format control device.**

(57) The present invention makes it possible to execute communication between an image-information storage and a terminal even in case they have different image formats. An image data delivery request transmitted from any of terminals (11a - 11c) and received by a receiving portion (13) includes an information indicating that the terminal has a source format CIF or QCIF. This information is transferred to a communication control portion (14) which informs an source format control portion (17) of the source format CIF or QCIF of the terminal. When the terminal has the CIF source format, the required data transmitted from an image-information storage device (19) are transmitted through a transmitter portion to the terminal. When the terminal 11d has the QCIF source format, a part of the image data transferred from the image-information storage device (19) is extracted and converted into data of QCIF format by the source format control portion (17). The converted data of QCIF source format are then trans-

mitted through a transmitting portion (15) to the terminal (11d).

FIG.4

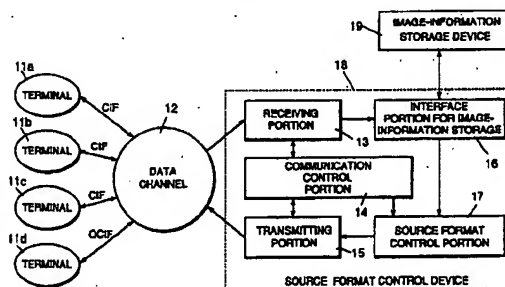

EP 0 660 580 A2

BACKGROUND OF THE INVENTION

The present invention relates to an image-information format control device and more particularly to an image-information storage and communication system which realizes services for delivering and mailing audio visual information from the image-information storage to any of terminals over a communication network where to they are connected.

The terminals are classified into two groups having different source formats - CIF (Common Intermediate Format) and QCIF (Quarter CIF).

The CIF has a hierarchical structure comprising of 4 hierarchies, i.e., frame, group of blocks (GOB), macro-block (MB) and block, and it represents such a source format that a luminance sample comprises of 352 pixels \times 288 lines per frame and a chrominance sample comprises of 176 pixels \times 144 lines.

The QCIF has reduced to 1/2 numbers of pixels and lines respectively in comparison with the CIF.

The operation of the conventional image-information storage and communication system will be described below:

Data of each frame comprise of a picture start code (PSC), temporal reference (TR), type information (PTYPE), extra insertion information (PEI), spare information (PSPARE) (a set of the above-mentioned components is called as frame header) and following thereafter data of GOB. Each frame is divided into 12 GOB for CIF format and 3 GOB for QCIF format.

Data of each GOB comprise of a GOB start code (GBSC), group number (GN), quantizer information (GQUANT), extra insertion information (GEI), spare information (GSPARE) (a set of above-mentioned components is called as a GOB header) and following thereafter data of a macro-block (MB). Each GOB is divided into 33 MBs.

Data of each MB comprise of a macro-block address (MBA), type information (MTYPE), quantizer information (MQUANT), motion vector data (MVD), coded block pattern (CBP) (a set of the above-mentioned components is called as a macro-block (MB)) and following thereafter block data. 1 MB is comprised of 4 blocks of luminance blocks and 2 blocks of chrominance.

Data of one block comprise of a transform coefficient and a code EOB indicating the end of block marker. Data of a conversion coefficient are comprised of 8 \times 8 data.

Let us suppose a case when a terminal which is capable of handling CIF format or QCIF format requests the image-information storage to transmit an image-information. Data transmitted from the terminal over the data channel are received by the

receiving portion. The received data contain data indicating which format CIF or QCIF the terminal has and data indicating what kind of the image information the terminal requires. The received data are then sent to the image-information storage 8 through the interface portion thereof. The image-information storage holds data of image-information in two different formats CIF and QCIF and can transmit the requested image-information data in the format specified by the terminal.

Besides conventional interactive communication services such as telephone, facsimile and so on, an audio delivery service being capable of storing audio-information in a center of networks and reproducing it any time at the request has recently been provided. With development of digital communication networks, which is represented by Integrated Services Digital Network (ISDN), it has also become possible to utilize image communication services, e.g., audio visual service. In these circumstances, the demand for image-information delivery services increases more and more and such services have partly been realized.

In the conventional image storage and communication system, the same image is stored in two different formats, resulting in considerable waste of memory. But, if image-information data are stored in only one of formats (i.e., CIF or QCIF), it becomes impossible to communicate with terminals having a different source format.

Furthermore, the conventional image-information reproducing system involves such a problem that in case when image-information is stored in the format CIF in an image-information storage at a network center and a video data receiving terminal can decode video information of the QCIF format only, the image data stored in the CIF format can not be transmitted from the center to the terminal.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an image-information format control device for use in an image-information storage and communication system, which realizes image-information communication between an image-information storage and any terminal in a network even when the terminal has an image format being different from that of the stored image-information, and which, if image-information stored in a data storage portion can not be decoded by a receiving terminal, converts it into data having a size and a format receivable and decodable at the receiving side.

It is another object of the present invention to provide an image-information format control device which the application of a source format control device enables a conventional image-information storage and communication system to store image

data only in CIF format system with an effective use of its memory and communicate with terminals irrespective of difference in image format of the terminals.

It is another object of the present invention to provide an image-information format control device which a center control device of the system is provided with a header converting portion which rewrites a header of a source format according to an information about communicating conditions in case when the stored source format can not be received by a receiving terminal for the image reproduction; a source format converting portion which converts a format of image data into a format receivable by the receiving terminal; a code-amount control portion which rewrites or extracts a part of a screen image-information to obtain an image-information of a format and a size receivable by the receiving terminal. Conversion of a source format from CIF into QCIF can be conducted using the center portion data of the image of CIF to eliminate the possibility of losing the necessary information for users.

Data transmitted from a terminal and received by the receiver portion includes data for identifying a source format (CIF or QCIF) of the terminal and data for identifying a kind of image-information required by the terminal. The format identifying information is transferred to the communication control portion whereby it is read and further transferred to the source format control portion, while the data identifying the requested image-information are sent through the interface portion to the image-information storage wherefrom the requested image data in the CIF format are transferred through the interface to the source format control portion.

The source format control portion has been informed of the image data format (CIF or QCIF) of the terminal. Therefore, if the terminal uses the CIF format, the data from the image-information storage are transmitted through the transmitter portion to the receiving terminal without any processing. If the terminal uses QCIF format, the source format control portion extracts a part of the image data received from the image-information storage, converts the data into QCIF data that are then transmitted through the transmitter portion to the terminal.

Since the system further includes a header converting portion for rewriting a header of image-information according to the communicating conditions memorized together with an image data and the capability of a receiving terminal in case when the image-information stored in the image-information storage can not be decoded by the receiving terminal; an image format converting portion for converting a format of image data into a format receivable by the receiving terminal; and a code

amount control portion for adjusting an amount of coded data to be transmitted, and it can rewrite a part of a screen image-information to be of a size and a format receivable by the receiving terminal and then extracts and transmits the rewritten image-information to the receiving terminal.

To realize the above-mentioned purposes, the present invention was made to provide an image-information format control device which includes a transmitter-receiver portion for transmitting and receiving image-information data, a source format control portion for controlling source formats, an interface portion for connecting with an image-information storage and a communication control portion for controlling the above-mentioned portions and communications and, which, in case when it is impossible to conduct image data communication between the image-information storage and a receiving terminal because of incompatibility of the format of the image data stored in the image-information storage with the format receivable by the terminal, selects a part of the coded image-information to compose data having the format receivable by the receiving terminal and then transmits said data to the receiving terminals.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a view showing a conventional image-information communication system.

FIG. 2 shows hierarchical structures of conventional CIF and QCIF formats.

FIGS. 3A, 3B, 3C and 3D show data structures of hierarchies of conventional CIF and QCIF formats. FIG. 4 is a construction view for explaining a source format control device embodying the present invention.

FIG. 5 is an explanatory diagram of CIF-to-QCIF format conversion according to the present invention.

FIG. 6 shows another example of CIF-to-QCIF format conversion according to the present invention.

FIG. 7 is a construction view of a source format control portion shown in Fig. 4.

FIG. 8 is a view showing another example of CIF-to-QCIF format conversion method according to the present invention.

FIG. 9 is a view showing an example of a source format conversion according to the present invention.

PREFERRED EMBODIMENT OF THE INVENTION

Fig. 1 shows a structure of a conventional image-information storage and communication system which includes terminals 1a - 1d, a data channel 2, a receiving portion 3, a communication con-

trol portion 4, a transmitting portion 5, an image-information storage 8, an interface portion 6 for connecting with the image-information storage device 8, and numeral 7 designates a connection control portion.

The terminals 1a - 1d are classified into two groups having different source formats - CIF (Common Intermediate Format) and QCIF (Quarter CIF).

The CIF has a hierarchical structure comprising of 4 hierarchies, i.e., frame, group of blocks (GOB), macro-block (MB) and block as shown in Fig. 2, and it represents such a source format that a luminance sample comprises of 352 pixels \times 288 lines per frame and a chrominance sample comprises of 176 pixels \times 144 lines.

The QCIF has reduced to 1/2 numbers of pixels and lines respectively in comparison with the CIF. A hierarchical structure of data is shown in Fig. 3A - 3D.

Referring now to Fig. 2 and 3A - 3D, the operation of the conventional image-information storage and communication system will be described below:

As shown in Fig. 3A, data of each frame comprise of a picture start code (PSC), temporal reference (TR), type information (PTYPE), extra insertion information (PEI), spare information (PSPARE) (a set of the above-mentioned components is called as frame header) and following thereafter data of GOB. Each frame, as shown in Fig. 2, is divided into 12 GOB for CIF format and 3 GOB for QCIF format.

As shown in Fig. 3B, data of each GOB comprise of a GOB start code (GBSC), group number (GN), quantiser (GQUANT), extra insertion information (GEI), spare information (GSPARE) (a set of above-mentioned components is called as a GOB header) and following thereafter data of a macro-block (MB). Each GOB is divided into 33 MBs as shown in Fig. 2.

As shown in Fig. 3C, data of each MB comprise of a macro-block address (MBA), type information (MTYPE), quantiser (MQANT), motion vector data (MVD), coded block pattern (CBP) (a set of the above-mentioned components is called as a macro-block (MB)) and following thereafter block data. 1 MB is composed of 4 blocks of luminance blocks and 2 blocks of chrominance.

As shown in Fig. 3D, data of one block comprise of a transform coefficients and a code EOB indicating the end of a block. Data of a transform coefficients are comprised of 8 \times 8 data as shown in Fig. 2.

Let us suppose a case when a terminal of CIF format or QCIF format requests the image-information storage 8 to transmit an image-information. Data transmitted from the terminal over the data channel 2 are received by the receiving portion 3.

The received data contain data indicating which format CIF or QCIF the terminal has and data indicating what kind of the image-information the terminal requires. The received data are then sent to the image-information storage device 8 through the interface portion 6 thereof. The image-information storage device 8 holds data of image-information in two different formats CIF and QCIF and can transmit the requested image-information data in the format specified by the terminal.

Besides conventional interactive communication services such as telephone, facsimile and so on, an audio delivery service being capable of storing audio-information in a center of networks and reproducing it any time at the request has recently been provided. With development of digital communication networks, which is represented by Integrated Services Digital Network (ISDN), it has also become possible to utilize image communication services, e.g., audio visual service. In these circumstances, the demand for image-information delivery services increases more and more and such services have partly been realized.

Referring to drawings, a preferred embodiment of the present invention will be described as follows:

Fig. 4 is a construction view for explaining an example of image-information storage and communication system for video delivery service, which is provided with a source format control device according to the present invention. The system includes terminals 11a - 11d, a data channel 12, an image-information storage and a source format control portion that comprises a receiving portion 13, communication control portion 14, a transmitting portion 15, an interface portion 16 for connecting with the image-information storage device 19 and a source format control portion 17, a source format control device 18 and an image-information storage device 19.

Data transmitted from any terminal 11a - 11c are received by the receiving portion 13 wherefrom a part of the data, which indicates a type of data format-CIF or QCIF of the terminal, is sent to the communication control portion 14 that in turn reads the data and transfers them to the source format control portion 17. The other part of the data, which indicates a kind of image data required by the terminal, is transmitted through the interface portion 16 to the image-information storage device 19 wherefrom the requested image data in the format of CIF are transferred through the interface to the source format control portion 17.

The source format control portion 17 has been informed by the communication control portion 14 of the type of image data format (CIF or QCIF) adopted by the terminal. When the terminal uses CIF data, the data of CIF received from the image-

information storage device 19 are not subjected to any processing and transmitted through the communication control portion 14 to the terminal. In case of the terminal 11d using QCIF data, the data of CIF received from the image-information storage device 19 are transferred to the source format control portion 17 whereby they are partly extracted and converted into the data of QCIF which are then transmitted to the receiving terminal 11d through the transmitting portion 15.

Fig. 5 is a view for explaining how to convert data format into QCIF.

One of methods for converting an image data format from CIF into QCIF, which is applicable in the source format control portion 17, is such that a frame of CIF is divided into 4 divisions and image data contained in one of the divisions, i.e., data of GOB (group of blocks) Nos. 1, 3 and 5 are extracted from GOB hierarchy and transmitted. The data of the other GOBs are not transmitted. In this case, a left upper quarter of a screen image of CIF format is converted into a screen image of QCIF format.

Fig. 6 is a view for explaining another method of converting data format to QCIF.

The source format control portion 17 stores in its memory a plurality of patterns for extracting data from CIF format 22, any of which can be selected by each terminal. For instance, QCIF format 21 patterns comprising GOB Nos. (1,3,5), (2,4,6), (7,9,11), (8, 10, 12) respectively are previously prepared: when any one of the patterns is selected from a terminal, the source format control portion 17 transmits data of the selected QCIF format to the terminal.

In an image-information storage device and communication system that realizes video-and-audio information delivery and mailing services over a network connecting terminals to an image-information storage device, the embodiment of the present invention, as described above, enables the system to communicate with the terminals even when image data format of the image-information storage device differs from that of the terminals. Namely, the image-information format control device according to the present invention comprises a transmitting portion and a receiving portion for transmitting and receiving image-information data, a source format control portion for controlling source formats, an interface portion for connecting with an image-information storage device and a communication control portion for controlling the above-mentioned portions and communications and, which, in case when it is impossible to conduct image data communication between the image-information storage device and a receiving terminal because of incompatibility of the format of the image data stored in the image-information

storage device with the format receivable by the terminal, extracts a part of the coded image-information to compose data of the format receivable by the receiving terminal and then transmits said data to the receiving terminals.

Fig. 7 is a construction view of the source format control portion shown in Fig. 4, there are shown a data storage portion 31, an image format converting portion 32, a header converting portion 33, a code amount control portion 34, a system control portion 35 and a multiplexing and demultiplexing portion 36.

First, a communication capability is negotiated between image-information storage center and a motion video terminal at beginning of communication there between to get an information of video decoding capability of the terminal. The capability information of the terminal is sent from the multiplexing and demultiplexing portion 36 to the system control portion 35. When a request for reproduction of an image is received from the terminal, the system control portion 35 reads requested image data from the data storage portion 31 and transfers the image data to the image format converting portion 32. The system control portion 35 also gets an information indicating communicating conditions such as a format of image data, which has been stored together with the data at the time of storing the data. When the video-decoding capability of the terminal is limited to QCIF and the information on the communication conditions of the stored image data is CIF, the system control portion 35 gives the image format converting portion 32 an instruction for converting the source format CIF into QCIF.

The format conversion may easily be performed by selecting three GOB, e.g., GOB1, GOB3 and GOB5 neighboring to each other from the data of format CIF and by rewriting GOB numbers of them. This method, however, causes such a problem that the reproduced image of QCIF is shifted in a vertical or horizontal direction with reference to the stored image of CIF. Since a screen image usually indicates its important object, e.g., a person's figure at the center portion thereof, the above-mentioned method may lose the desired image-information. Accordingly, image format conversion shall be conducted using a substantially center portion of a stored image of CIF as shown in Fig. 8.

Referring to Fig. 9, an example of image format conversion is described below in detail:

Data addressed at MB17 of GOB3 in stored image data of CIF is first selected and addressed at MB1 of GOB1 of the image data of QCIF. The proceeding data of the center portion of the image are sequentially selected and arranged to form an image-information of QCIF format. Next, the con-

verted data of QCIF is processed by the header converting portion 33 that rewrites GOB numbers and MB addresses, e.g., MB17 of GOB3 and MB5 of GOB10 are changed into MB1 of GOB1 and MB33 of GOB3 respectively.

The image data after rewriting the header are transferred to the code amount control portion 34. In case when a minimum image interval of image-information at storing is the same as that at reproducing, there may occur an underflow of transmission data of the image converted from CIF into QCIF if no adjustment is made in advance. Accordingly, the code amount control portion 34 adjusts a quantity of codes in the image data by inserting therein fill bits for denoting absence of data. Last, the processed image data are multiplexed with audio data in the multiplexing and demultiplexing portion 36 and supplied therefrom into the communication network.

In the above-described embodiment of the present invention, a screen image-information stored in the image-information storage device and having a format, which can not be decoded for reproduction of the image at a receiving terminal, is partly rewritten in such a way that they may have a size and a format receivable by the terminal, and then the converted coded-image data are extracted therefrom and transmitted to the terminal. The embodiment, therefore, includes a header converting portion for rewriting a header of the source format according to an information about communicating conditions, which is memorized together with image data stored, with due consideration of the capability of the receiving terminal, an image format converting portion for converting the image format into a format receivable by the receiving terminal and a code amount control portion for adjusting a quantity of codes in the image data to be transmitted to the receiving terminal.

As many apparently widely different embodiments of this invention may be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

Claims

1. An image-information format control device comprising an image-information storage and communication system which realized services for delivering or mailing audio visual information from the image-information storage to any of terminals over a communication network whereto they are connected, characterized by a transmitting portion (15) and a receiving portion (13) for transmitting and receiving data of an image-information, a source format control

portion (17) for controlling a source format, an interface portion (16) for connecting with an image-information storage device (19) and a communication control portion (14) for controlling the above-mentioned portions, whereby in case of impossibility to transmit data of the image-information from the image-information storage device (19) storing the image-information data to a receiving terminal because of incompatibility of the source format of sending side with that of the receiving terminal, i.e., the image-information storage device (19), the device extracts a part of coded image-information to compose a format receivable by the terminal and then transmits the extracted and converted information to the terminal.

2. An image-information format control device according to Claim 1, wherein said source format control portion (17) holding a plurality of format data-patterns and transmits data of a format selected by a receiving terminal.
3. An image-information format control device according to Claim 1, wherein said source format control portion (17) is provided with a header converting portion (33) for rewriting a header of the source format according to an information about communicating conditions, said information memorized together with an image data when storing the image in a data storage portion (31), and according to a communicating capability of a receiving terminal in case of incapability of a receiving terminal to decode and reproduce a format of an image-information stored in the data storage portion (31); an image format converting portion (32) for converting image data into a source format receivable by the receiving terminal and a code amount control portion (34) for controlling an amount of codes of data to be transmitted, whereby in case of incapability of a receiving terminal to decode and reproduce format of image-information stored in the data storage portion (31), it rewrites only a part of the coded image-information to have a size and a format receivable by the receiving terminal, and then extracts and transmits said information to the receiving terminal.

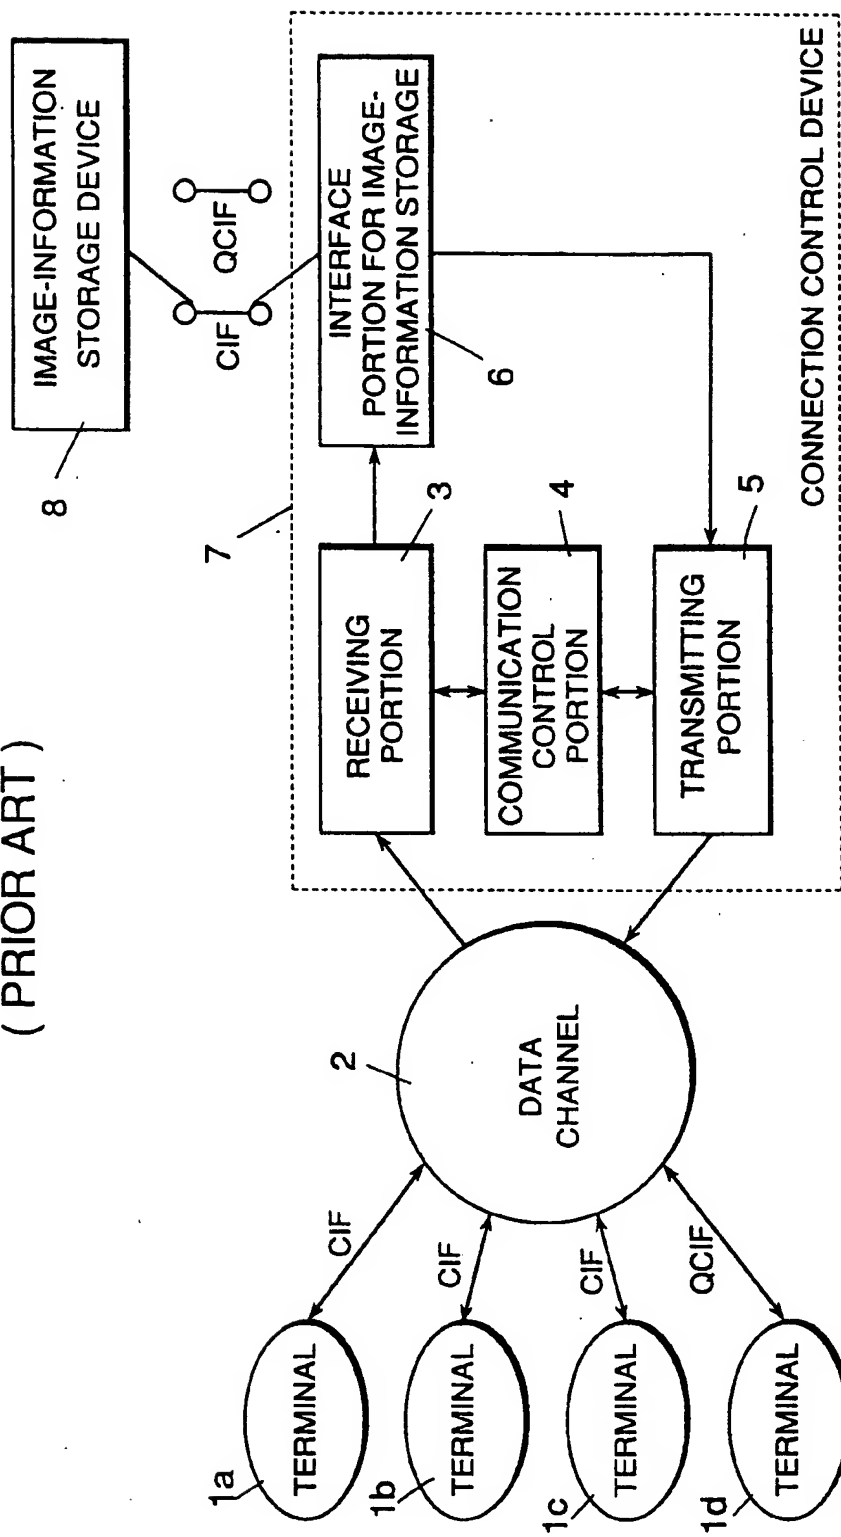
FIG.1
(PRIOR ART)

FIG.2
(PRIOR ART)

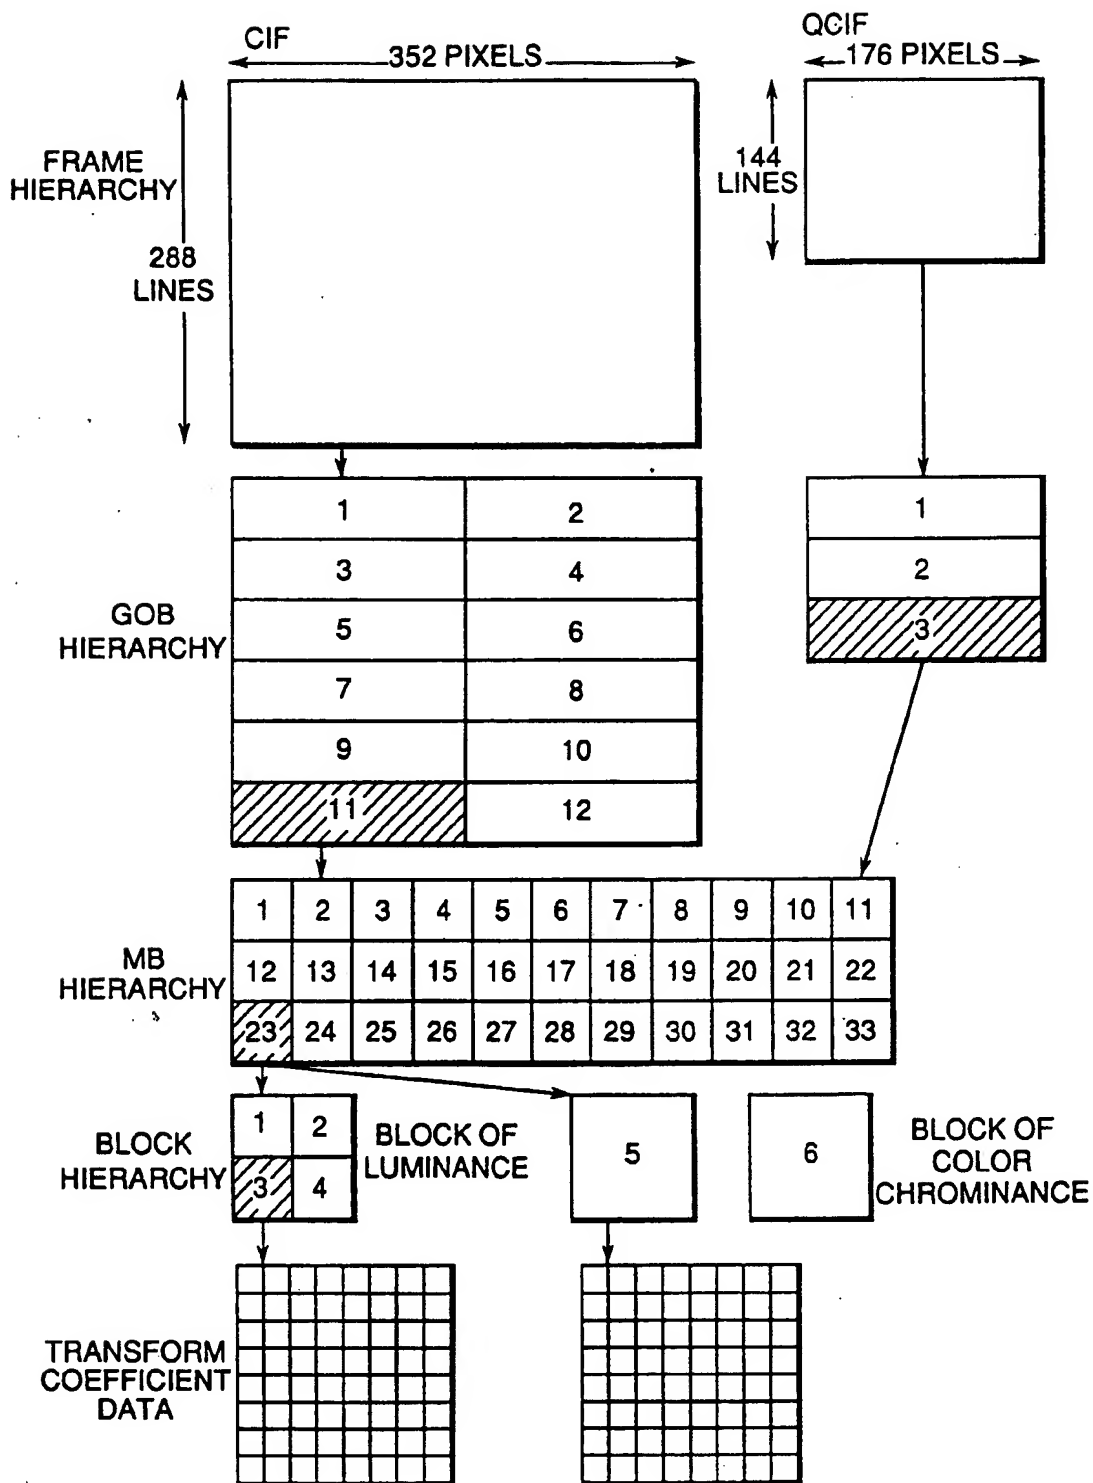


FIG.3A
(PRIOR ART)

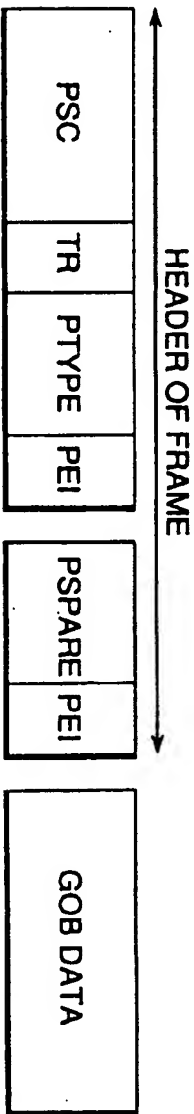


FIG.3B
(PRIOR ART)

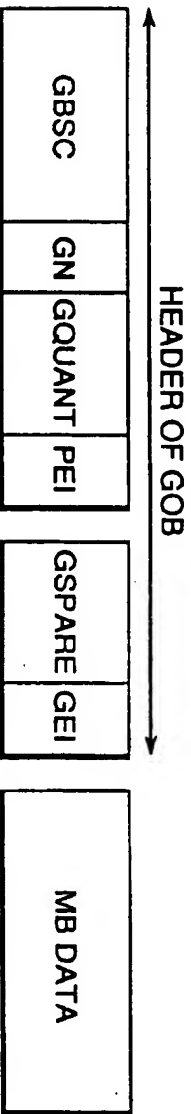


FIG.3C
(PRIOR ART)

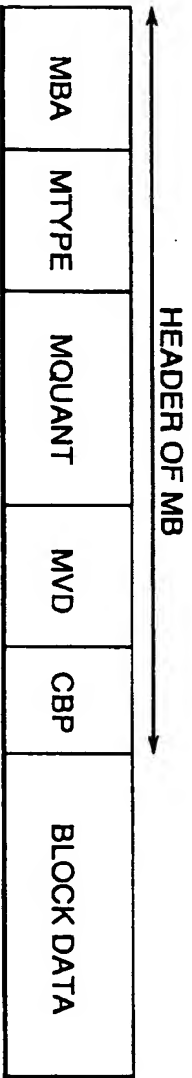
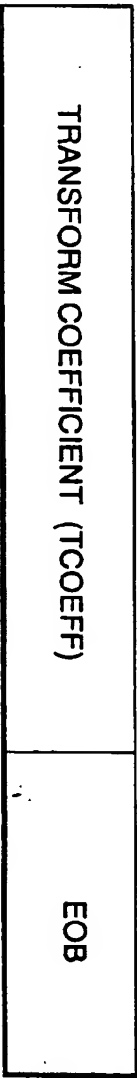


FIG.3D
(PRIOR ART)



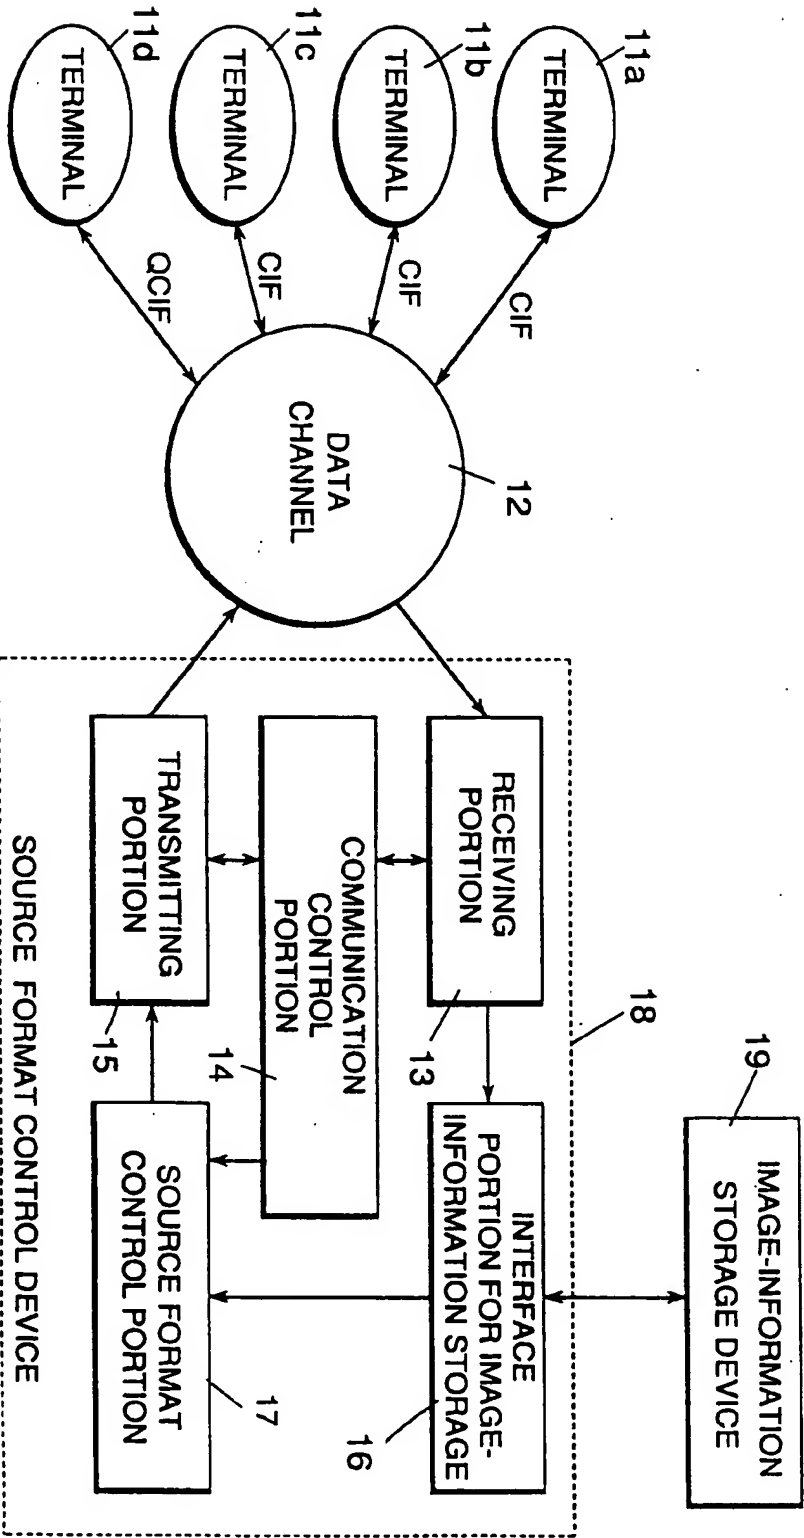


FIG.4

FIG.5

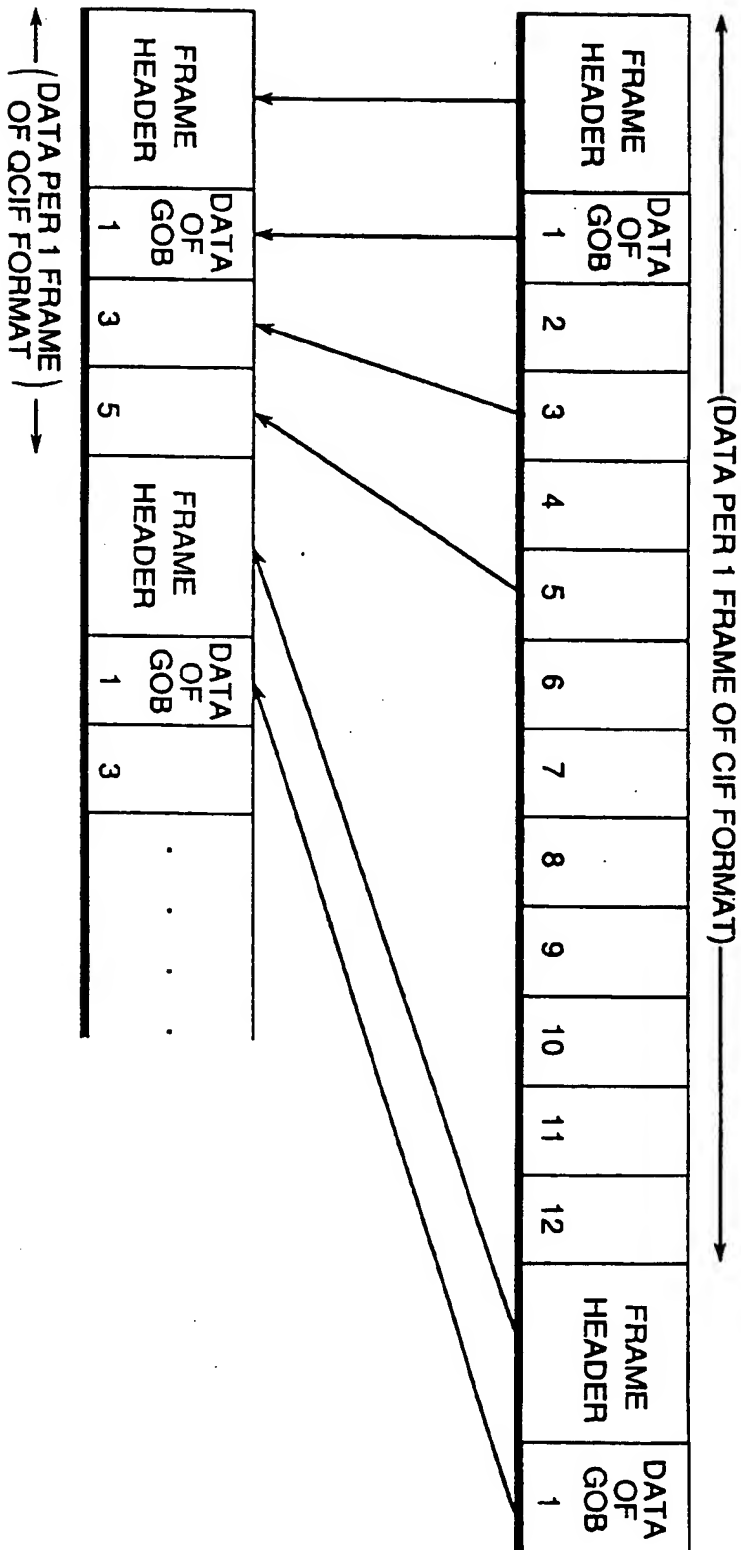


FIG.6

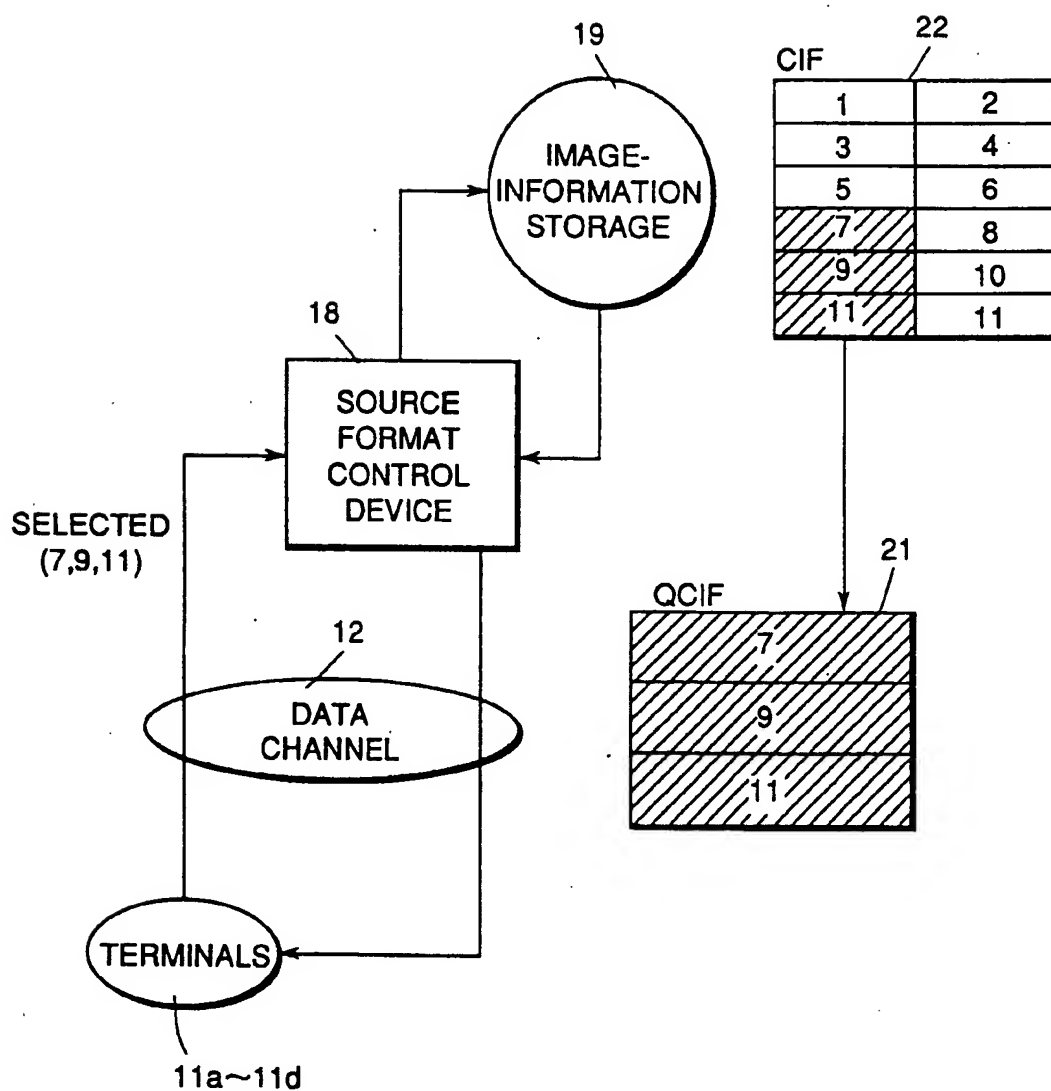


FIG. 7


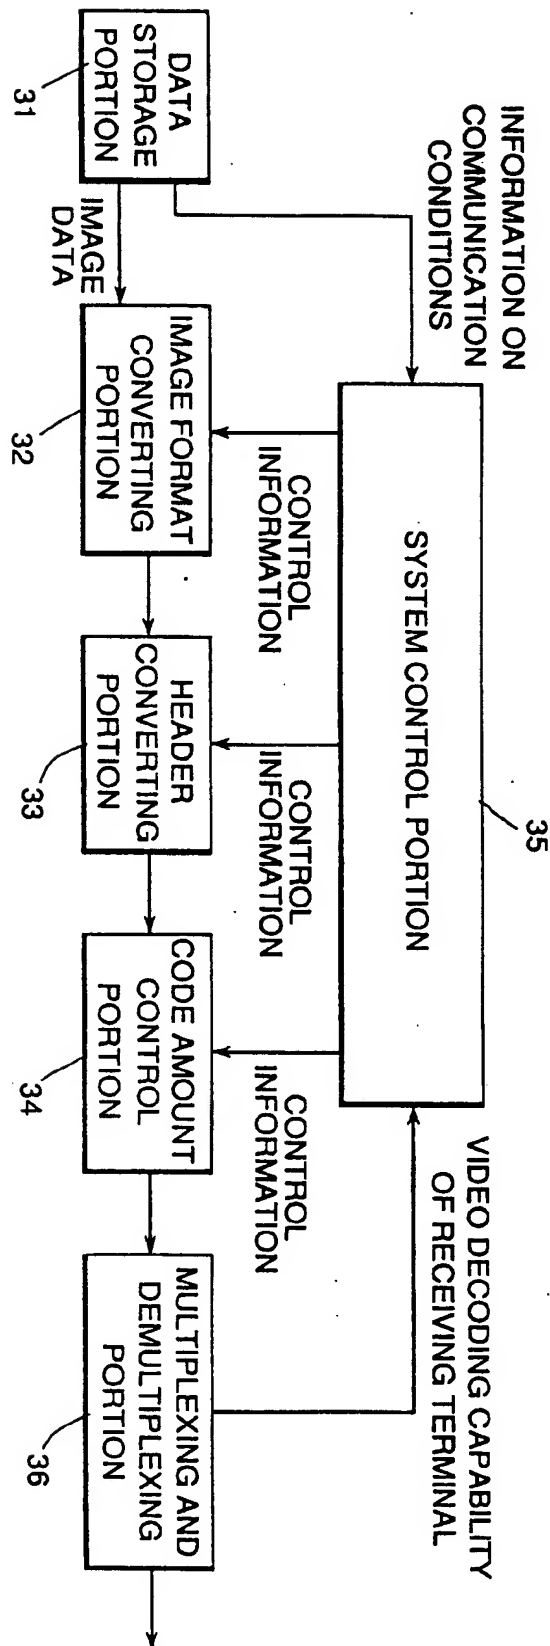


FIG.8

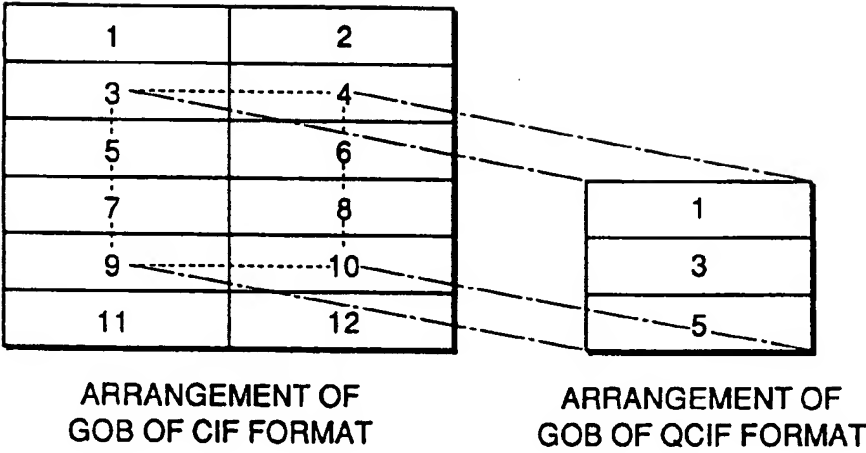

MACRO-BLOCK ADDRESS	CIF DATA STORED
00000000	00000000
00000001	00000001
00000002	00000002
00000003	00000003
00000004	00000004
00000005	00000005
00000006	00000006
00000007	00000007
00000008	00000008
00000009	00000009
0000000A	0000000A
0000000B	0000000B
0000000C	0000000C
0000000D	0000000D
0000000E	0000000E
0000000F	0000000F
00000010	00000010
00000011	00000011
00000012	00000012
00000013	00000013
00000014	00000014
00000015	00000015
00000016	00000016
00000017	00000017
00000018	00000018
00000019	00000019
0000001A	0000001A
0000001B	0000001B
0000001C	0000001C
0000001D	0000001D
0000001E	0000001E
0000001F	0000001F
00000020	00000020
00000021	00000021
00000022	00000022
00000023	00000023
00000024	00000024
00000025	00000025
00000026	00000026
00000027	00000027
00000028	00000028
00000029	00000029
0000002A	0000002A
0000002B	0000002B
0000002C	0000002C
0000002D	0000002D
0000002E	0000002E
0000002F	0000002F
00000030	00000030
00000031	00000031
00000032	00000032
00000033	00000033
00000034	00000034
00000035	00000035
00000036	00000036
00000037	00000037
00000038	00000038
00000039	00000039
0000003A	0000003A
0000003B	0000003B
0000003C	0000003C
0000003D	0000003D
0000003E	0000003E
0000003F	0000003F
00000040	00000040
00000041	00000041
00000042	00000042
00000043	00000043
00000044	00000044
00000045	00000045
00000046	00000046
00000047	00000047
00000048	00000048
00000049	00000049
0000004A	0000004A
0000004B	0000004B
0000004C	0000004C
0000004D	0000004D
0000004E	0000004E
0000004F	0000004F
00000050	00000050
00000051	00000051
00000052	00000052
00000053	00000053
00000054	00000054
00000055	00000055
00000056	00000056
00000057	00000057
00000058	00000058
00000059	00000059
0000005A	0000005A
0000005B	0000005B
0000005C	0000005C
0000005D	0000005D
0000005E	0000005E
0000005F	0000005F
00000060	00000060
00000061	00000061
00000062	00000062
00000063	00000063
00000064	00000064
00000065	00000065
00000066	00000066
00000067	00000067
00000068	00000068
00000069	00000069
0000006A	0000006A
0000006B	0000006B
0000006C	0000006C
0000006D	0000006D
0000006E	0000006E
0000006F	0000006F
00000070	00000070
00000071	00000071
00000072	00000072
00000073	00000073

IMAGE-INFORMATION DATA
CONVERTED INTO
QCIF FORMAT